


TEMPORARY FILL MATERIAL STOCKPILE
NTS

INLET PROTECTION DETAIL
NTS

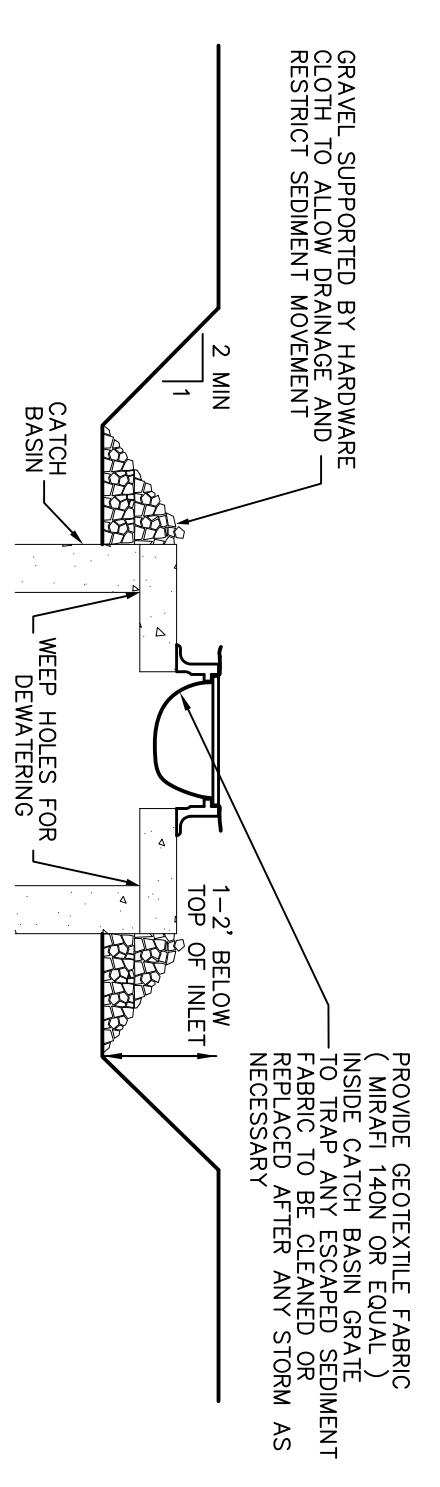


- CONSTRUCTION NOTES:**
1. CLEAR THE AREA OF ALL DEBRIS THAT WILL HINDER EXCAVATION.
 2. GRADE APPROX. TO THE INLET UNIFORMLY AROUND THE BASIN.
 3. EXCAVATION TO BE MADE TO THE PROPOSED FINISH GRADE.
 4. UPON STABILIZATION OF CONTRIBUTING DRAINAGE AREA, SEAL WEEP HOLES, FILL EXCAVATION WITH STABLE SOIL TO FINAL GRADE, COMPACT IT PROPERLY AND STABILIZE WITH PERMANENT SEEDING.

INSPECTION SCHEDULE	
INSPECT SILT FENCING	WEEKLY
INSPECT CONSTRUCTION FENCE	X
INSPECT MEANS TEMPORARILY MALCHED	X
INSPECT TEMPORARY SOIL STOCKPILE	X
INSPECT STABILIZED CONSTRUCTION ENTRANCES	X
INSPECT MEAS THAT HAVE BEEN TEMPORARILY MALCHED	X
INSPECT STORMWATER POND AND SEDIMENT TRAP	X

NOTE: IF WINTER CONSTRUCTION WILL OCCUR BETWEEN OCTOBER 15 AND APRIL 15 REFER TO THE WINTER EROSION CONTROL GUIDELINES FOR ADDITIONAL EROSION AND SEDIMENT CONTROL REQUIREMENTS APPLYING TO ANY COMPONENT OF THE PROJECT.

ON-SITE COORDINATOR:
PEAKCM CONSTRUCTION
PHONE - (802) 988-1092

Owner/Applicant
3 GEORGE STREET, LLC
218 OVERLAKE DRIVE
COLCHESTER, VT 05466

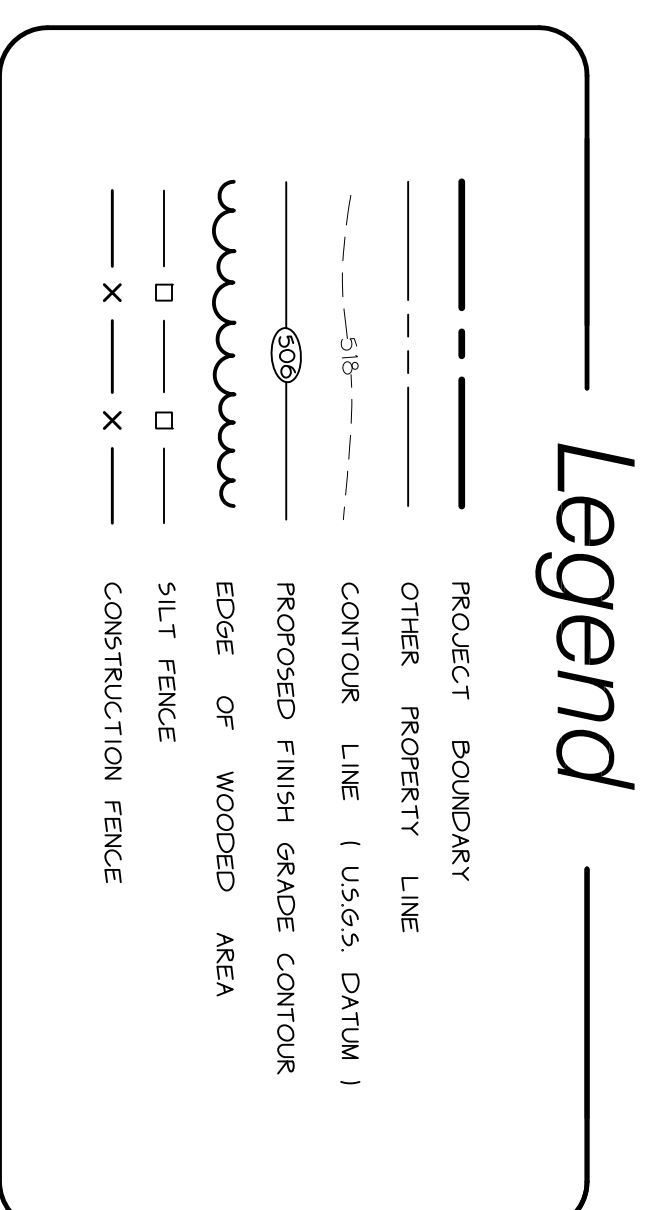


CONSTRUCTION SEQUENCING FOR EROSION PREVENTION + SEDIMENT CONTROL

THE ON-SITE COORDINATOR SHALL INSPECT THE SITE AND THE SEDIMENT CONTROL MEASURES A MINIMUM OF ONCE EVERY SEVEN DAYS, PRIOR TO THE START OF CONSTRUCTION AND PRIOR TO ANY SIGNIFICANT DISTURBANCE. A VOLUME LARGE ENOUGH TO DISCHARGE RUN-OFF FROM THE SITE. THE WEEKLY REPORT AND EROSION CONTROL PLAN WILL BE KEPT ON-SITE.

MAJOR CONSTRUCTION ITEM	EROSION CONTROL	MAINTENANCE
1. MARK LIMITS OF AREA TO BE DISTURBED.	INSTALL CONSTRUCTION FENCING AT LOCATIONS SHOWN ON PLAN.	MAINTAIN UNTIL SITE CONSTRUCTION IS COMPLETED.
2. INSTALL SILT FENCING AND STABILIZED ENTRANCES PRIOR TO CONSTRUCTION.	INSTALL SILT FENCING AND STABILIZED ENTRANCES AT LOCATIONS SHOWN ON PLAN.	MAINTAIN SILT FENCE AND REMOVE DEPOSITS OF SILT. REMOVE AND REPLACE STONE AT ENTRANCE AS ORDERED BY THE ON-SITE COORDINATOR.
3. TOP-SOIL STOCKPILING	ANY STUMPS ARE TO BE DISPOSED OF AT AN APPROVED DISPOSAL SITE. A SILT FENCE IS TO BE INSTALLED AROUND THE BASE OF THE STOCKPILE. THE STOCKPILE IS TO BE SEED AND MULCHED WITHIN 48 HOURS OF PLACEMENT.	THE SILT FENCE IS TO BE MAINTAINED UNTIL THE STOCKPILE HAS BEEN REMOVED. IN-LIFE AREAS OF THE STOCKPILE ARE TO BE SEED AND MULCHED IF OPEN AND UNSEED FOR MORE THAN A WEEK.
4. CONSTRUCTION OF STORM SYSTEM ROAD/PARKING BASE.	DISTURBED AREAS ARE TO BE SEED AND MULCHED WITHIN 14 DAYS OF DISTURBANCE.	ROADWAY SIDESLOPES ARE TO BE INSPECTED WEEKLY OR IMMEDIATELY FOLLOWING A RUN-OFF PRODUCING STORM.
5. SEEDING AND MULCHING OF COMPLETED AREAS	AREAS THAT ARE FINISH GRADED ARE TO BE SEED AND MULCHED WITHIN 48 HOURS.	REMOVE SEDIMENT AND REPLACE STONE AS NECESSARY.
6. PAVING OF ROADWAY AREA	FINISH GRADING, SEED + MULCHING OF ANY UNFINISHED AREAS.	
7. BUILDING FOUNDATION EXCAVATION AND RE-GRADING	STOCKPILES SHALL BE LIMITED TO AREAS NOT INSIDE THE CONSERVATION ZONES OR BUFFERS.	DISTURBED AREAS ARE TO BE MAINTAINED UNTIL GRASS IS ESTABLISHED.

WINTER GUIDELINES FOR EROSION PREVENTION + SEDIMENT CONTROL

1. ALL DRAINAGE STRUCTURES MUST BE KEPT OPEN AND FREE OF SNOW AND ICE DAMS.
2. ALL SILT FENCE OR OTHER PRACTICES REQUIRING EARTH DISTURBANCE SHALL BE IN PLACE PRIOR TO GROUND FREEZING.
3. WHEN MULCH IS REQUIRED FOR STABILIZATION DOUBLE THE STANDARD RATE SHALL BE APPLIED.
4. TO ENSURE COVER OF DISTURBED SOIL IN ADVANCE OF A WET EVENT, AREAS OF DISTURBED SOIL MUST BE STABILIZED AT THE END OF EACH WORK DAY, WITH THE FOLLOWING EXCEPTIONS:
 - A. IF NO PRECIPITATION WITHIN 24 HOURS IS FORECAST AND WORK WILL RESUME IN THE SAME DISTURBED AREA WITHIN 24 HOURS, DAILY STABILIZATION IS NOT NECESSARY.
 - B. DISTURBED AREAS THAT COLLECT AND RETAIN RUNOFF, SUCH AS HOUSE FOUNDATIONS OR OPEN UTILITY TRENCHES.
 - C. PERFORMING DRILLING AND BLASTING WHERE SITE IS IN A DEREGRESSION AND STORMWATER IS TRAPPED.
5. PRIOR TO STABILIZATION SNOW AND ICE MUST BE REMOVED TO DEPTH OF NO LESS THAN 1 IN.
6. ALL DISTURBED AREAS MUST BE SEED AND MULCHED WITHIN 48 HOURS OF BEING BROUGHT TO FINISH GRADE.
7. DURING WINTER EROSION MULCH SHALL BE APPLIED AT DOUBLE THE RATE OR NETTING OR OTHER APPROACH SHALL BE USED TO PREVENT REMOVAL BY WIND.
8. ON SITE COORDINATOR MUST INSPECT THE SITE DAILY DURING ACTIVE EARTH WORK.

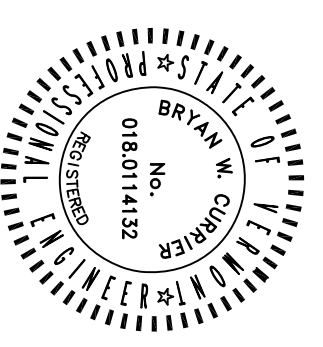

DATE	REVISION	BY
1-14-19		

SUBMIT: <input type="checkbox"/> RECORD DRAWING <input type="checkbox"/> PRELIMINARY DESIGN: <input type="checkbox"/> FINAL <input type="checkbox"/> SITE/COMMENTS DRAWN BY: O'LEARY-BURKE CIVIL ASSOCIATES, INC. CHECKED BY: O'LEARY-BURKE CIVIL ASSOCIATES, INC. SCALE: 1"=20' 13 CONVENT STREET FERRISVILLE, VT 05753 PHONE 838-8800 FAX 838-8801 EMAIL: oab@olearyburke.com	Hotel Champlain Burlington Vermont Erosion Control Plan Construction Plan	PLAN SHEET # E2
--	--	---------------------------